
This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		RELEASED FOR PRODUCTION.	9/29/2016	RJC	JAG

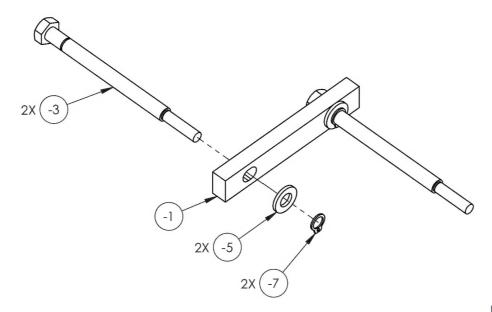

NOTE: REF, AIRBUS T/N: 1X56-136-273.

TITLE

RELEASE MECHANISM

DWG NO. RBE1X56-136-273

	MAT'L HEAT TREAT		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8
_	FINISH		.XX ± .01 ANGLES ±.5° .X ± .1 SURFACES = 125/
	SPEC		1. BREAK ALL SHARP EDGES
	DRAWN BY:	CLOUGH	.015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY
_	CHECKED:	DUERFELDT	AFTER PLATING
_	OPPS APPR:	ANDERSON	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
	QA APPR:	LINDSAY	USED ON MODEL

									- V ±	1 SURFACES = 12																				
ASSY	ASSY	D (O	Part	Part I	Part	Part	Part U	art UNIT	art UNIT	art UNIT	art UNIT	art UNIT	art UNIT	rt UNIT	rt UNIT	art UNIT	art UNIT	Part UNIT	art UNIT	rt UNIT	UNIT	т	h 4 - 4 1	R (O INFORMATION OR SPECIFICATIONS		SPEC				ALL SHARP EDGES
QTY	QTY	B/O	#	QTY			PG.	DRAWN BY:			5° OR .015R SIONAL LIMITS APPLY																			
					2.12	1010/1000 00		-	CHECKED:	DUERFE	LDT	AFTER	PLATING																	
			-1	1	BAR	1018/1020 CR		2	OPPS APPR:	R: ANDERSON 3. INTERPRET DIM		RET DIM AND TOL PER 14.5M-2009																		
			-3	2	HEX HEAD CAP SCREW	STEEL	M8 X 1.25 1 X 120mm, CLASS 8.8 (FASTENAL #39131) MODIFIED	3	QA APPR:	LINDSAY	/		USED ON MODEL																	
		B/O	-5	2	FLAT WASHER	STEEL	M8 (MCMASTER-CARR #91166A270)	1	APPROVED:	GILBERT			EC145																	
		B/O	-7	2	EXTERNAL RETAINING RING	STEEL	FOR Ø8mm SHAFT X .8mm (MCMASTER-CARR #98541A116)	1	SCALE	1:2	DATE	8/9/2016	SHEET 1 OF																	

REVISIONS This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR. REV ECR DESCRIPTION ENGRAVE T/N, S/N,-MADE IN USA 1.1 3.94 - .68 --**--** 2X .08 4X FULL R -2X .313 2X .320^{+.005}_{-.000} .63 .38 2.43 TITLE **RELEASE MECHANISM** RBE1X56-136-273-1 MAT'L 1018/1020 CR HEAT TREAT FINISH ZINC PLATE SPEC ASTM B633 TYPE I SC 2 DRAWN BY: CLOUGH CHECKED: DUERFELDT (-1)OPPS APPR: ANDERSON QA APPR: LINDSAY APPROVED: **BAR** GILBERT

INITIAL APPROVED

REV

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

.XXX ± .005 FRACTIONS ± 1/8

.XX + .01 ANGLES ±.5°

X ± .1 SURFACES = 125/

USED ON MODEL

EC145

SHEET 2 OF 3

1. BREAK ALL SHARP EDGES .015 x 45 'OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009

8/8/2016

SCALE

1:1


DATE

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED





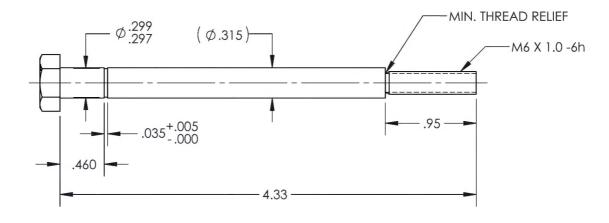

(-3)

HEX HEAD CAP SCREW

DART

TITLE

RELEASE MECHANISM

DWG NO.

RBE1X56-136-273-3

R

MALL SIEE	L	DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8					
HEAT TREAT							
	PLATE	.XX ± .01 ANGLES ±.5° .X ± .1 SURFACES = 125/					
	B633 TYPE I SC 2	1. BREAK ALL SHARP EDGES					
DRAWN BY:	CLOUGH		.015 x 45° OR .015R - 2. DIMENSIONAL LIMITS APPLY AFTER PLATING				
CHECKED:	DUERFELDT						
OPPS APPR:	ANDERSON		3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009				
QA APPR:	LINDSAY		USED ON MODEL				
APPROVED:	GILBERT		EC145				
SCALE	1.1 DATE	8/	9/2016	SHEET 3 OF 3			